




Installation & Maintenance Manual

SLD-HB-XXXX LED High Bay Lighting

IMPORTANT SAFETY INSTRUCTIONS *Mesures de Sécurité à Respecter*

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Ce produit doit être installé selon le code d'installation pertinent, par une personne qui connaît bien le produit et son fonctionnement ainsi que les risques inhérents.

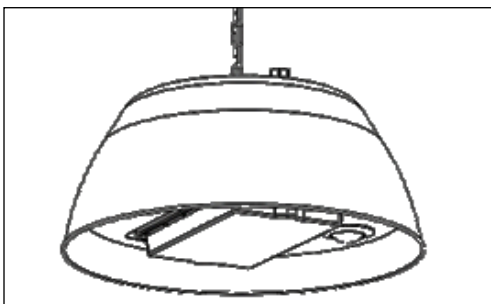

Brief Introduction

Installation instructions for the Linear LED high bay luminaire via chain/pendant suspension.

Pendant LED Luminaire—Certified to Canada/US Standards

CSA C22.2 No. 250.0

UL1598, 3rd Edition

Suitable for Wet Locations. *Convient aux emplacements mouillés.*

Install with minimum spacings of 30 cm (1 ft) between top of luminaire and the ceiling.
Installer avec des espacements minimum de 30 cm (1 FT) entre haut de luminaire au plafond.

Not suitable for ceiling mount application. *Ne convient pas aux applications de montage au plafond.*

Keep protective barrier in place. *Ne pas enlever l'écran protecteur.*


For chain or hook suspension only. *Suspendre seulement à l'aide de chaînes ou de crochets.*

Twist-on wire connectors are not re-usable. Replace only with un-used weatherproof twist-on wire connectors. *Remplacer uniquement avec de nouveaux intempéries twist-on connecteurs de fils.*


Min 90°C supply conductors. *Les fils d'alimentation doivent convenir pour 90°C.*

Not for use in dwellings. *Ne pas utiliser dans les logements.*

Basic Information

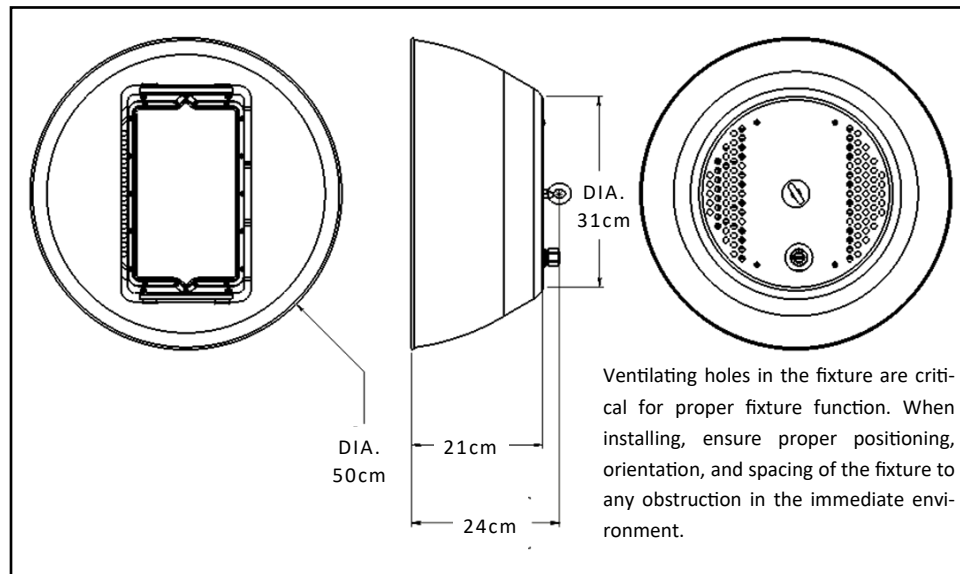

Wiring Instructions

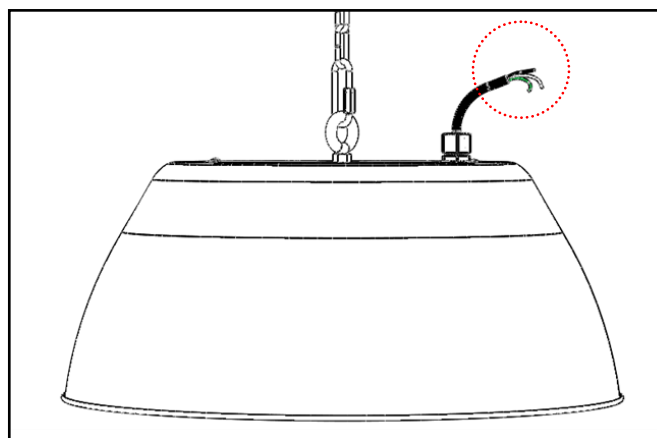

Wiring is to be terminated outside the enclosure from the supplied whip exiting the fixture.


Where applicable, ensure the enclosure of electrical components are properly grounded to earth ground.

Be aware of potential hazards when installing or servicing.

Power off AC main supply before installing or servicing.

Wiring from LED Driver to AC Supply, or LED Driver Terminal Block Colouring		AC/Line 100-277/347V Supply Connection (Black)18AWG)
		AC/Neutral Connection (White)
		Earth Ground Connection (Green)
Wiring for 0-10V Dimming		Dim + Connection (Violet, or as Labeled)
		Dim - Connection (Grey, or as Labeled)

Suspension Kit Installation

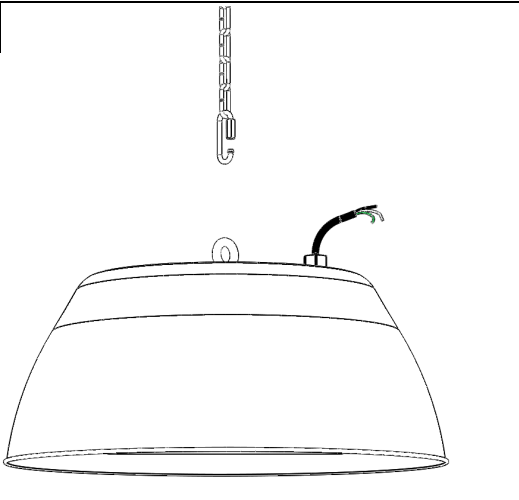1		Chain for suspension, Quick Link, Latch hook, and other related hardware will not be provided with the luminaire. Eyebolt is already pre-assembled onto the luminaire. Attach the high bay via the eyebolt. Attach the link to the eyebolt. Lock the link or hook to ensure installation security.
2	